



This Detail Drawing may not be altered or changed in any manner except by the City Engineer. It is the responsibility of the user to acquire the most current version.

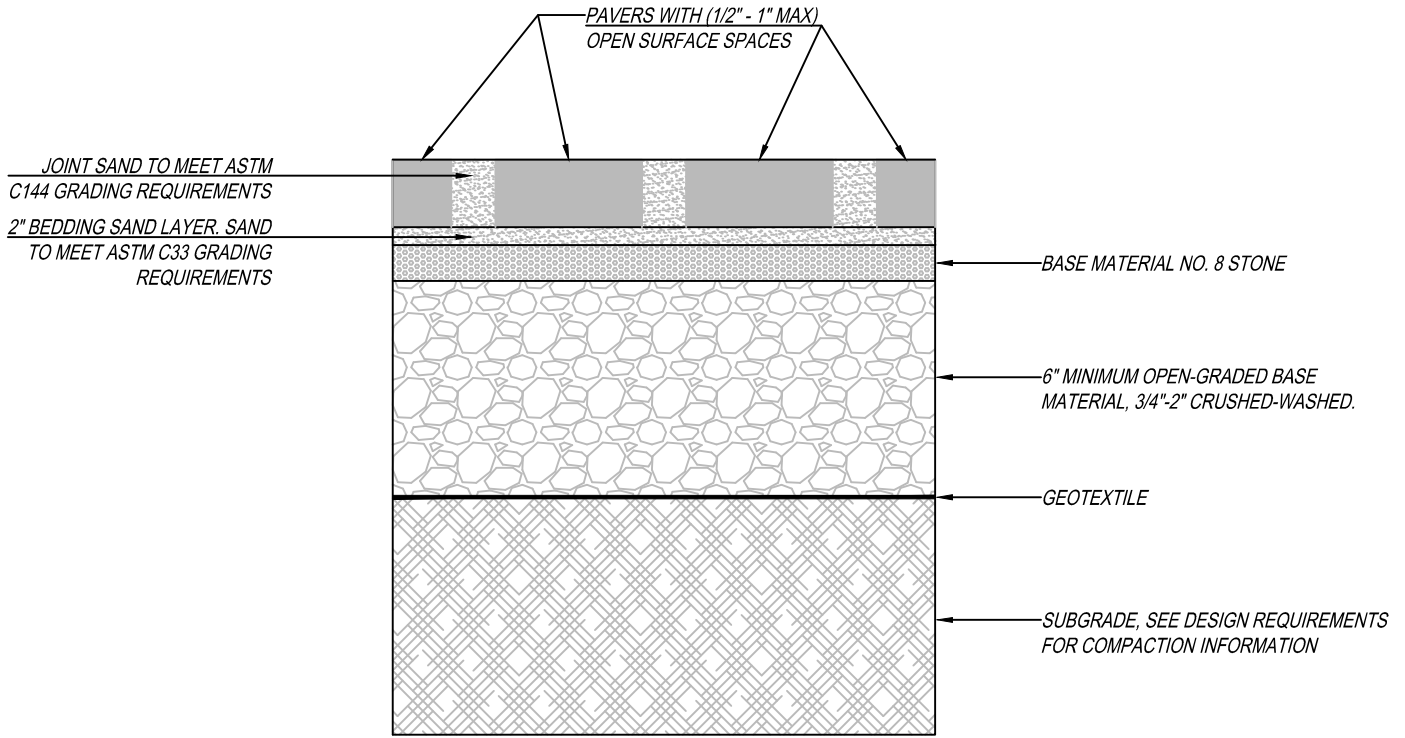

PERVIOUS CONCRETE BLOCK OR "PAVER" SYSTEMS

NOTES:

1. THE DESIGN ENGINEER SHALL SUBMIT PERVIOUS PAVEMENT DESIGN AND SPECIFICATIONS IN CONFORMANCE WITH INDUSTRY STANDARDS.
2. PAVERS AVERAGE COMPRESSIVE STRENGTH OF 8,000 PSI. NO INDIVIDUAL UNIT LESS THAN 7,200 PSI. MINIMUM 80 MM THICKNESS.
3. BANDED BY CONCRETE EDGE RESTRAINTS ST-6082.
4. MANHOLE COLLARS PER DETAIL ST-6081.

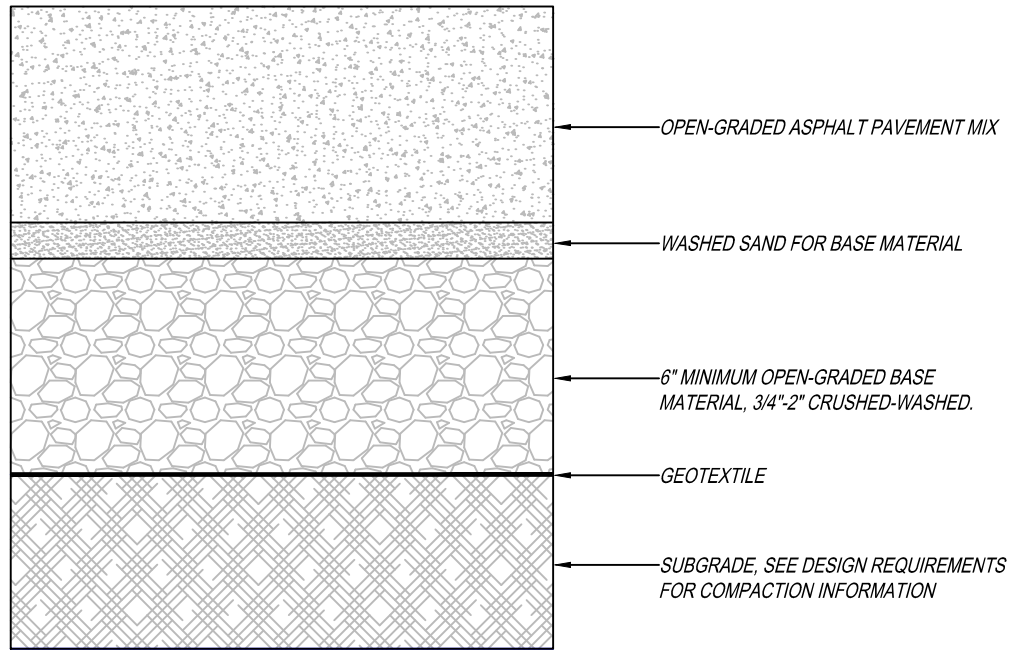

PERVIOUS (OPEN GRADED) CONCRETE SYSTEMS

Pervious Pavement

DRAWING NUMBER: ST-6080

DRAWN BY: SR

SCALE: N.T.S.

FILE NAME: ST-6080.DWG

APPROVED BY: NK

DATE: 10/29/14

**CITY OF
WILSONVILLE**



PUBLIC WORKS STANDARDS